

Instructions for Installation/Setup WebGUI

Fibersystem Fiber Optical Switches with WebGUI

60-00-7574 Fiber Optical Switch 1x2 2-channel multimode

60-00-7334 Fiber Optical Switch 1x2 6-channel multimode

60-00-7338 Fiber Optical Switch 1x32 2-channel multimode

Step 1:

Set your host TCP/IPv4 to static as follows:

IP-address: 192.168.1.10

Netmask: 255.255.255.0

Step 2:

Go to your web browser and go to: 192.168.1.1

Fibersystem's fiber optical switches has below settings as default:

Username: admin
 Password: changeit
 IP-address: 192.168.1.1
 Netmask: 255.255.255.0
 Default gateway: 192.168.1.254

The settings can be changed after login.

Controlling the switch via REST API:


HTTP command to set port N:

192.168.1.1/rest/fosw/set_port?port=N

HTTP command to get active switch port:

192.168.1.1/rest/fosw/get_port


Controlling the switch via RS422/485:

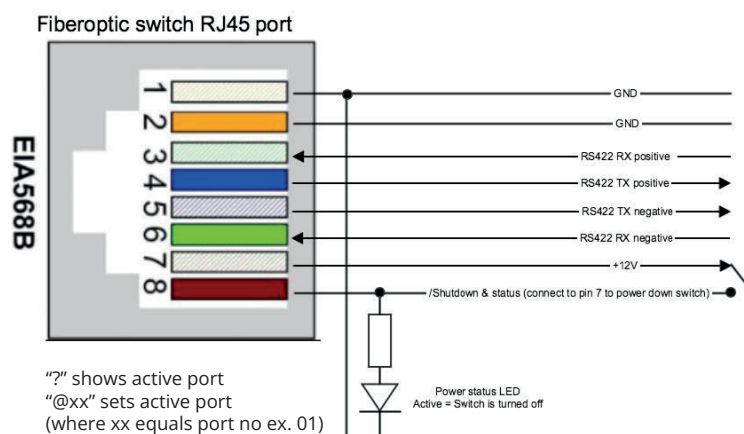

Fibersystem AB is an inventive Swedish company who since 1982 has been working with the application of fiber optic technology in the delivery of solutions fulfilling the customers' multitude of needs.

All products can be customised according to customer needs!

- | | | | |
|-----------------------|-------------------|----------------------|------------------|
| 1. Admin Login | 3. System Info | 5. Change Password | 7. System Update |
| 2. Management Options | 4. Network Config | 6. Custom User Field | 8. Port Select |

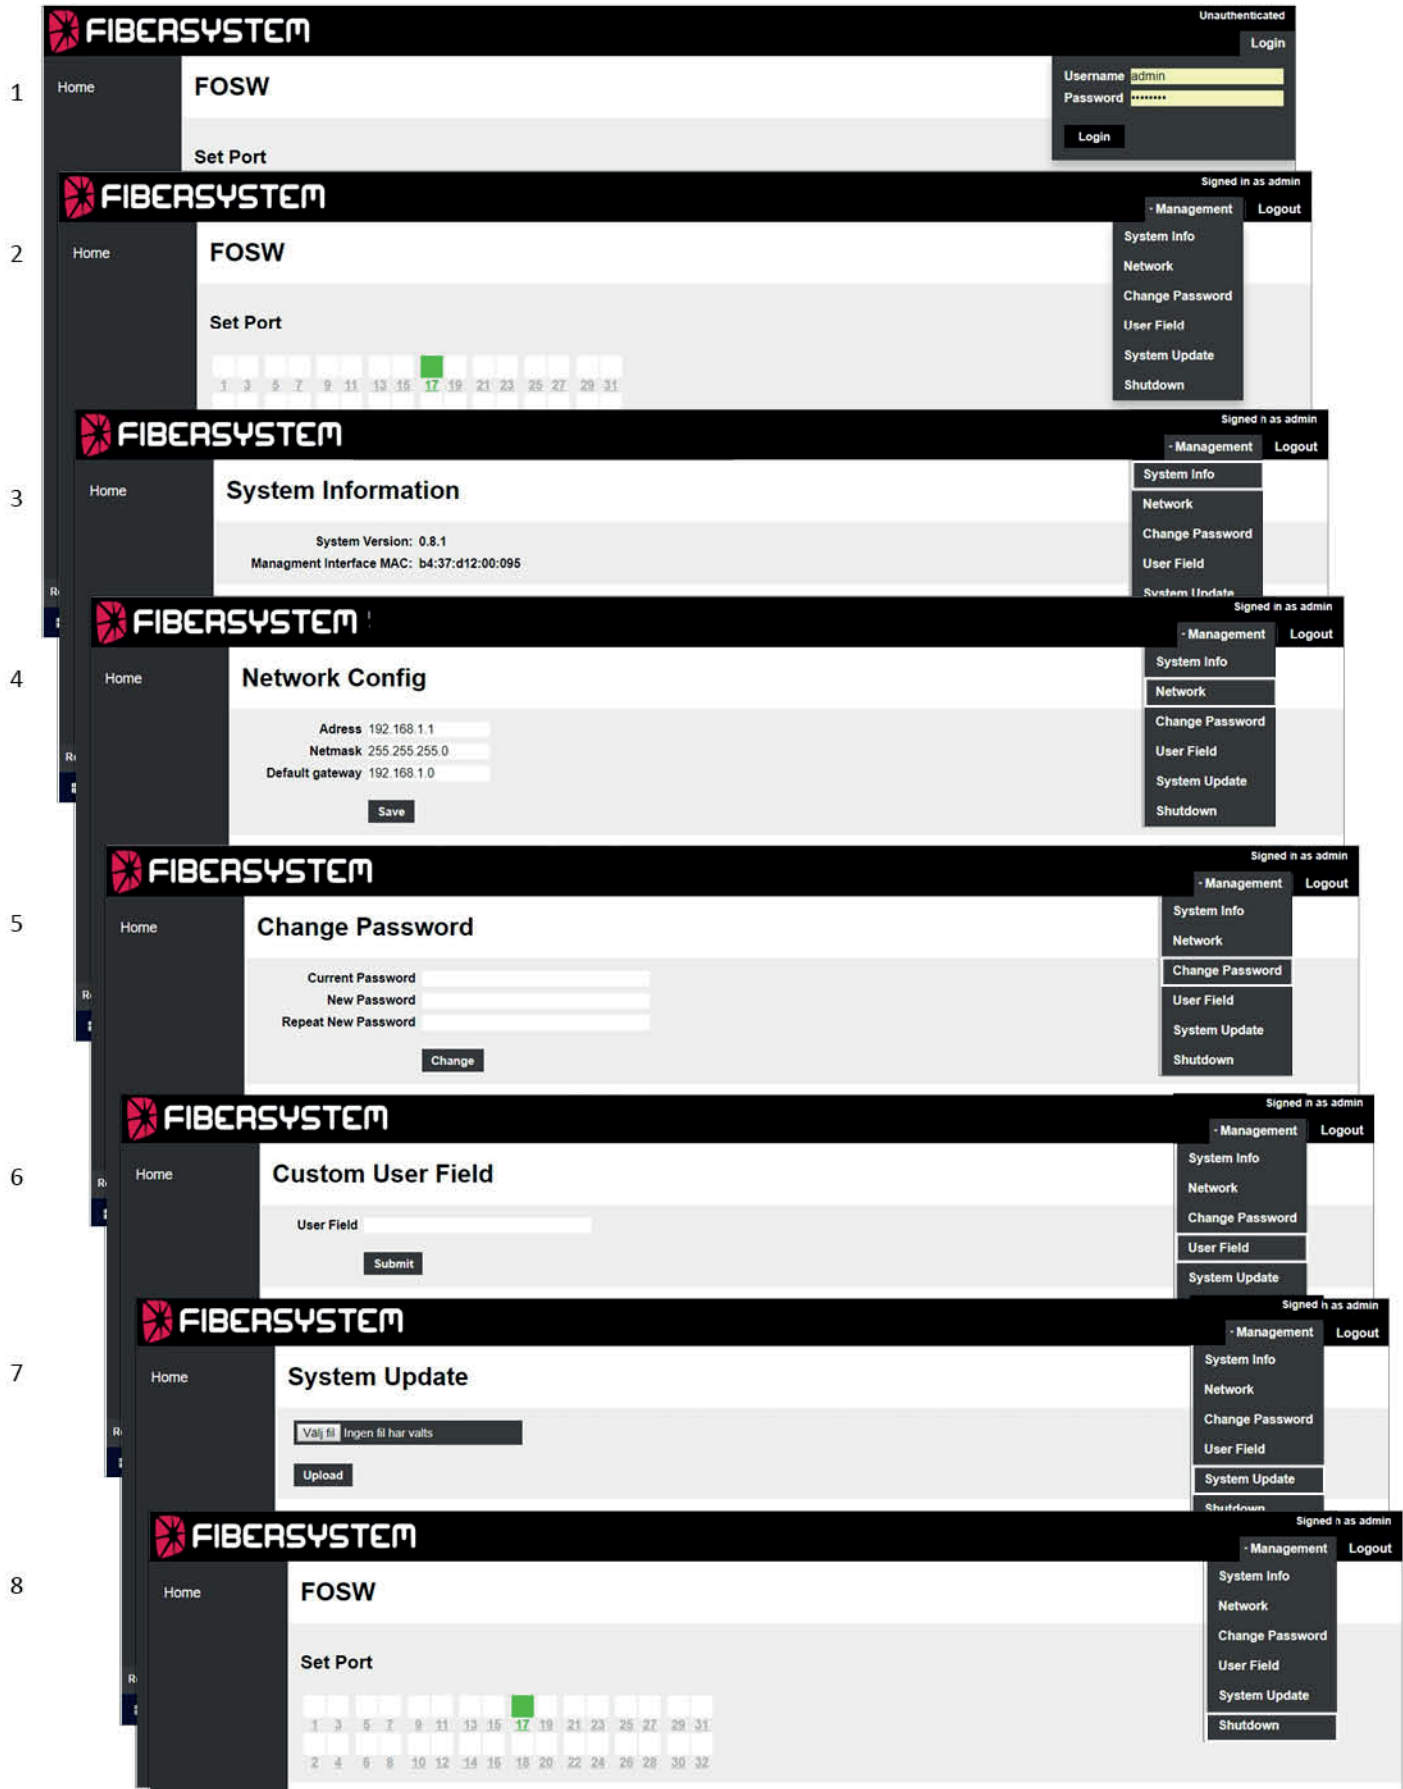

The screenshots illustrate the following steps in the FIBERSYSTEM Web GUI:

- Admin Login:** The user enters 'admin' as the username and a password to log in.
- Home:** The user is logged in as 'admin'. The interface shows a 'Set Port' button and a calendar for selecting a date.
- System Information:** The user navigates to 'System Info', displaying details like System Version 0.8.1 and Management Interface MAC: b4:37:d12:00:095.
- Network Config:** The user navigates to 'Network', showing fields for Address (192.168.1.1), Netmask (255.255.255.0), and Default gateway (192.168.1.0).
- Change Password:** The user navigates to 'Change Password', providing current and new passwords.
- Custom User Field:** The user navigates to 'User Field', entering a custom field value.
- System Update:** The user navigates to 'System Update', clicking 'Upload' to initiate the update process.
- Home:** The user returns to the home screen, which includes a 'Set Port' button and a calendar.